






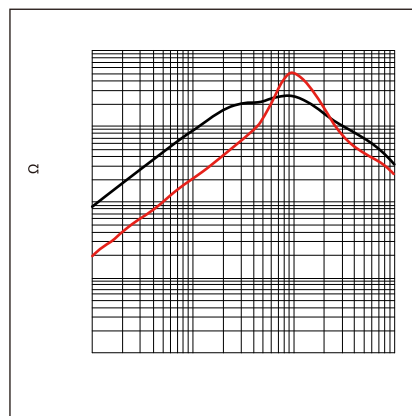
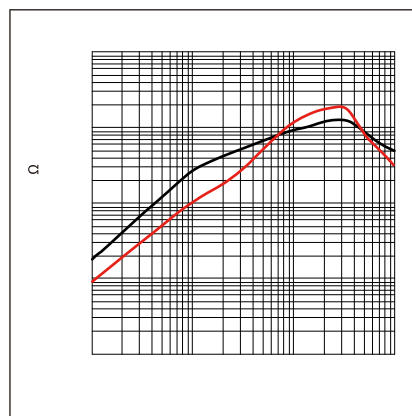





- Exclusive square type closed magnetic core designed as an
- Low profile design makes it optimal for surface mounting
- Excellent impedance characteristics, making it great for
- Maximum 15A can be used in 125°C environments
- Operating temperature range: -40 to +125°C
- AEC-Q200 qualified
- Quantity: 1500pcs
- for various DC power lines, multimedia devices, and

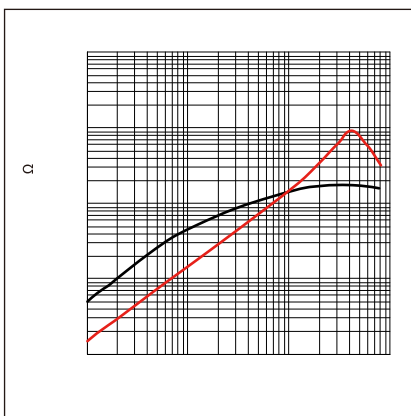


Part No	Z @ 100 MHz Min. (Ω)	Z @ 100 MHz Typ. (Ω)	I_R Max. (A)	R_{DC} Max. (m Ω)	V_{DC} Max. (Volts)	I_R Min. (mA)
BCMA7060-700Y	40	70	15	5	80	10
BCMA7060-141Y	100	140	9.0	10	80	10
BCMA7060-301Y	225	300	5.0	10	80	10
BCMA7060-501Y	400	500	5.0	10	80	10
BCMA7060-701Y	500	700	4.0	15	80	10
BCMA7060-102Y	800	1000	3.0	17	80	10
BCMA7060-132Y	910	1300	3.0	20	80	10
BCMA7060-272Y	2000	2700	1.0	63	80	10
BCMA7060-302Y	2500	3000	0.9	75	80	10

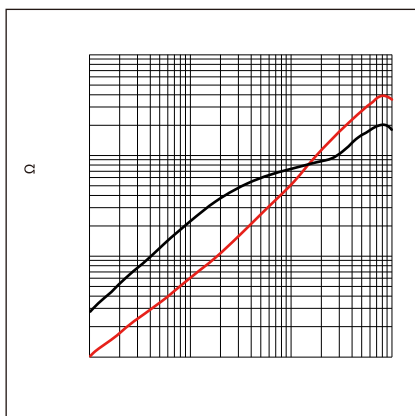

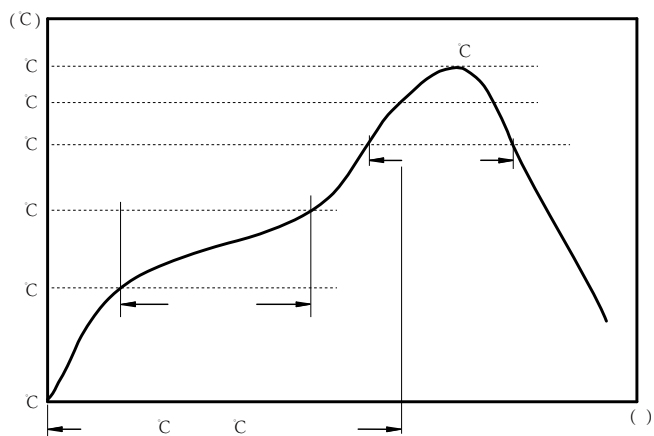

c
c
c

:

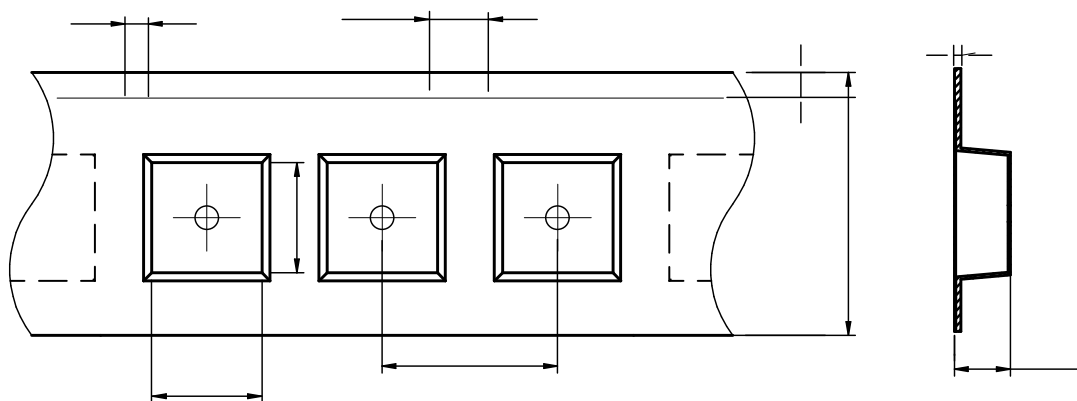

45? 3) ("	(z' f " z#) z' f " z#	#z' f " z#	&z' f " z#	#\$z' f " z#	#{z' f " z%	%z' f " z#	#z' f " z#	"z&' f " z'

? Sd] [Y	Bd] f [Y ;_ bWWS' UW'i
-----------	-------------------------





:

•

•

•

•

•

•

•

•

•

•

•

•

•