


# MDTA Series

## FEATURES

- Flat wire coil for low copper losses
- #
- †
- High current capacity
- AE# j
- \ C @
- j

## APPLICATION

- ) # ) #
- Noise suppressor for motor
- Wiper brush (500000) Os0000
- E Aers

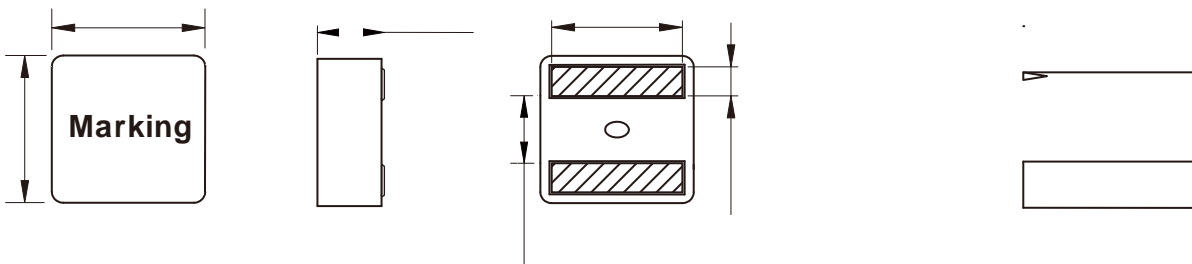

Part No	L@100KHz /0.1V (μH)	Tolerance	I <sub>SAT</sub> Typ. (A)	I <sub>R</sub> (A)		R <sub>DC</sub> Max. (m Ω)
				20°C rise	40°C rise	
U) u° k U	2.00	±20%				
U) u° k U	2.20	±20%				
U) u° k U		±20%				
U) u° k U		±20%				
U) u° k U		±20%				
U) u° k U		±20%				
U) u° k U		±20%				
U) u° U		±20%				
U) u° U		±20%				
U) u° U	22.0	±20%				



