


NRSM Series

Wire Wound SMD Power Inductor


Size 4012



Dimensions: [mm]

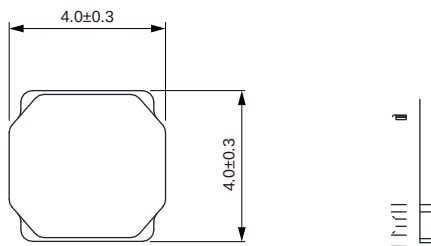

Land Pattern: [mm]



Electrical Properties:

Part No	Inductance @ 1MHz/1V (μ H)	Tolerance	Temperature Rise Current Typ. (A)	Temperature Rise Current Max. (A)	Satura on Current Typ. (A)	Satura on Current Max. (A)	DC Resistance Typ. (Ω)	DC Resistance Max. (Ω)
NRSM4012S-R47M	0.47	$\pm 20\%$	4.30	3.80	8.20	7.20	0.033	0.041
NRSM4012S-R56M	0.56	$\pm 20\%$	3.80	3.20	7.00	6.00	0.040	0.050
NRSM4012S-R68M	0.68	$\pm 20\%$	3.80	3.25	6.20	5.20	0.042	0.055
NRSM4012S-1R0M	1.00	$\pm 20\%$	3.50	3.00	4.60	3.80	0.049	0.059
NRSM4012S-1R5M	1.50	$\pm 20\%$	3.20	2.80	4.50	3.80	0.060	0.075
NRSM4012S-2R2M	2.20	$\pm 20\%$	3.00	2.50	3.30	2.80	0.075	0.090
NRSM4012S-3R3M	3.30	$\pm 20\%$	2.50	2.00	3.30	2.80	0.106	0.130
NRSM4012S-4R7M	4.70	$\pm 20\%$	2.10	1.80	2.60	2.30	0.145	0.175
NRSM4012S-6R8M	6.80	$\pm 20\%$	1.75	1.50	2.20	1.60	0.190	0.230
NRSM4012S-100M	10.0	$\pm 20\%$	1.00	0.85	1.85	1.55	0.300	0.360
NRSM4012S-150M	15.0	$\pm 20\%$	0.98	0.83	1.75	1.40	0.440	0.570
NRSM4012S-220M	22.0	$\pm 20\%$	0.90	0.80	1.25	1.00	0.650	0.800

Typical Electrical Characteristics:

