



# SDDA Series

## SMD Shielded Power Inductor

### Size 1280

#### FEATURES


- Low loss realized with low DCR.
- High performance realized by metal dust core.
  
- 100% Lead(Pb)-Free and RoHS compliant.
- 
- 
- 




#### APPLICATION

- 
- HVAC
- 
- Audio subsystem
- Digital instrument cluster
- 
- SEPIC circuit


#### Dimensions: [mm]

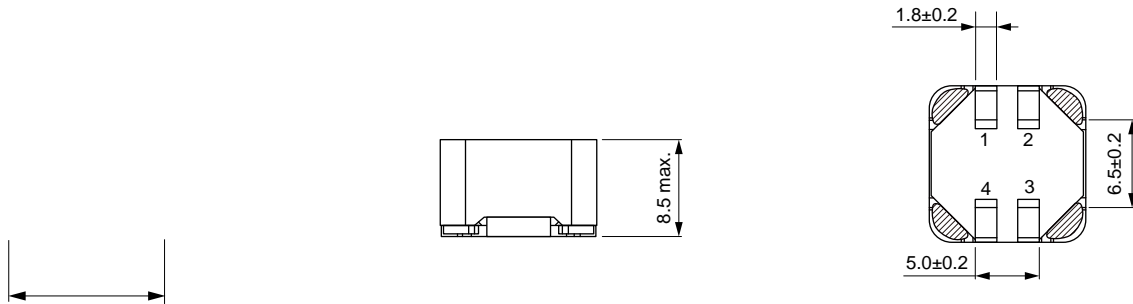

#### Land Patterns: [mm]

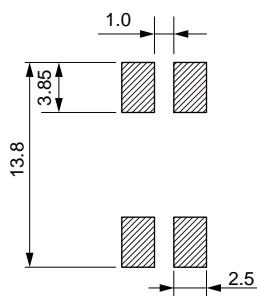


#### Schematic:

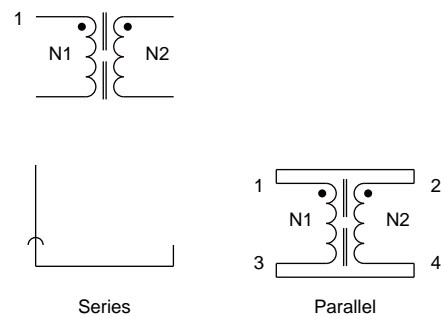





## Soldering Reflow:

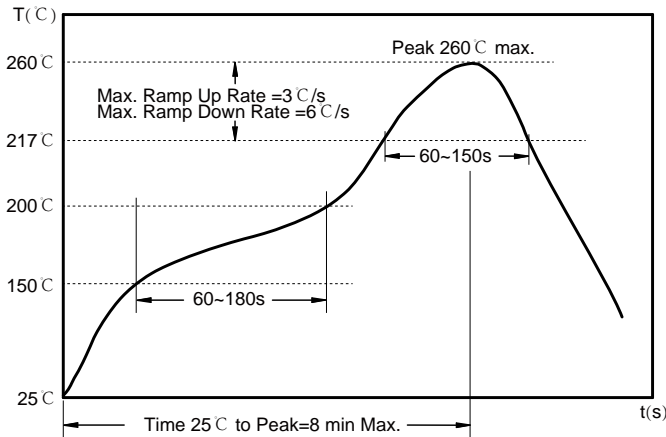

Preheat condition: 150 ~200°C / 60~180 sec.

Allowed time above 217°C : 60~150 sec.


Max temperature: 260°C .

Max time at max temperature: 5 sec.P1

Allowed Reflow time: 3x max.


## Packaging Information:

### Tape Dimension :

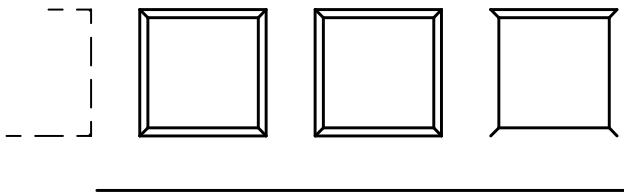


Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
SDDA1280	12.5±0.1	12.5±0.1	1.5±0.1	4.0±0.1	20.0±0.1	24.0±0.3	8.4±0.1	1.75±0.1	0.50±0.05


### Peel force of top cover tape:

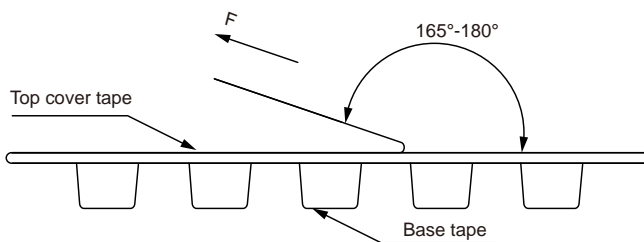

The peel force of top cover tape shall be between 0.1 to 1.3 N



Reel Dimension: [mm]

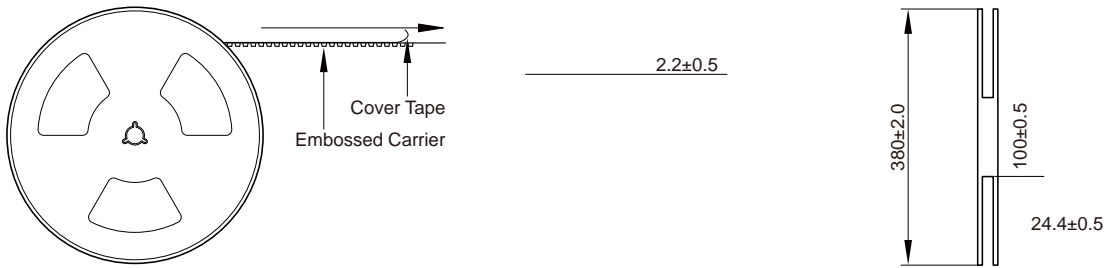

Packaging Quantity:

500 Pcs/Reel

2 Reel /Inner box( 1000 Pcs)